



MF 3000

Mass flow measurement for bulk materials



Compact and economical inline measurement

HUMY 3000
Moisture
measurement

MF 3000
Mass flow
measurement

FlowSwitch Series
Mass flow
monitoring

Application and Function


Our solid flow meter MF 3000 is designed for flow measurement in metallic pipes from a few kg/h to many t/h. The system is suitable for on-line measurements of powders, dusts, pellets, and granules from 1 nm up to 2 cm in pneumatic or free fall conditions.

The measurement principle of the MF 3000 is based on the physical Doppler-Effect, whereas the sensor generates a uniform field in the microwave frequency range inside the pipe. These microwaves are being reflected by particles pass-

ing through the pipe. Calculation of frequency and amplitude changes allows for accurate determination of solid flow. Non-moving particles like dust accumulation are excluded from the calculation.

The installation is simple and cost effective via a welded branch, through which the sensor is screwed flush to the inside of the pipe. The sensor is connected to a DIN-rail mounted transmitter with 4...20 mA, RS232 and RS485 output. The calibration is easy by using our MF-SMART software and a reference flow value.

Main Benefits


- ◆ For pneumatic conveyors and free falling process'
- ◆ For all solid materials from a few kg/h to many t/h
- ◆ No armatures inside the pipe and inside flush fitting
- ◆ Very fast measurement and contact less measuring
- ◆ Adjustable sensitivity
- ◆ Easy, quick and cost effective installation and start up
- ◆ Galvanic separated DIN-Rail Transmitter with RS232- and RS485-Interface
- ◆ Limit alarm monitoring with alarm contact
- ◆ Sensor-transmitter distance up to 2.000 m
- ◆ Robust stainless steel version, abrasion and maintenance free
- ◆ ATEX for Zone 20 and Zone 2 

Putting into work

A branch is welded onto the pipe. A 18 mm hole is drilled, the sensor is mounted flush with the inner diameter of the pipe. For commissioning and calibration a notebook with our MF-SMART software is needed.

Calibration can be performed with either one or multiple reference flow amounts. The measurement value is output either analog or as digital signal.

A serial COM interface is available at the front of the transmitter to connect a notebook computer and a RS485 interface for connection to a PLC system.

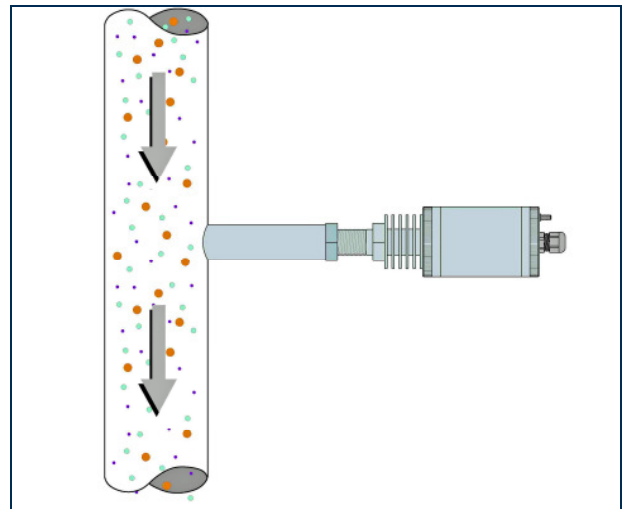

Application examples of successfully measured products

MF 3000 is measuring in pneumatic transportations and free falling process'. The product's grain size can be between 1 nm and 20mm.

The moisture of the measured material is allowed to be changed up to 12%.

Materials:

all dust, powders, granulates, panels, threads
also sticking or abrasive materials

Industries:

animal feed industry
building materials industry
production of ceramics
cement industry
chemical industry
detergent industry
engineering companies
food industry
glass production

Range of detection:

from kg/h to many t/h

metal production
pharmaceuticals
pigment production
plastic industry
production of rubber goods
recycling industry
synthetic materials
production of textiles
tobacco industry
washing powder industry

Applications



Wood Dust




Jet Material



Plastic Granules



Coal Dust

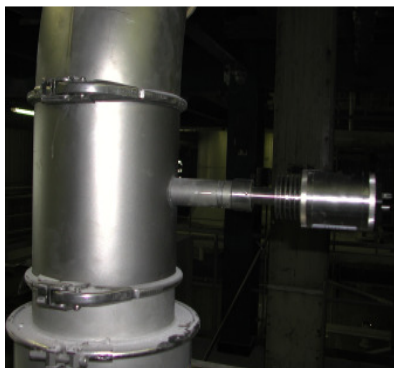

Fertilizer



Iron-II-Sulfate

Process Data MF 3000

Measurement start free fall	Ca. 1 kg/h
Measurement start Pneum. transport	Ca. 1 kg/h
Max. pipe diameter	DN 300 (bigger diameter on request)
Grain size	1 Nanometer up to 20 mm
Moisture	Depending on the product
Pressure	Up to 6 bar (Option up to 30 bar)
Temperature	-20 up to +90 °C (Option up to +750 °C)


Technical Data Sensor

Medium touched parts	Stainl. steel 1.4307 and PA 6.6
Process connecting	Welding flange
Housing material	Stainl. steel 1.4307 or ST52
Protection class	IP 65
Power supply	Via transmitter

Technical Data Transmitter


Construction	DIN-Rail, 22,5 mm
Auxiliary energy	24 V AC/DC
Power consumption	Max. 2W (+0,3 – 8,5W for thermocouple)
Ambient temperature	-10 to +60 °C
Protection class	IP 30
Output signal	0/4-20 mA (max. 750 Ohm) 0/2-10 Volt
Interfaces	RS232, RS485
EX-classification (optional)	II 3G Ex nA II T4 II ½ D IP67 T 130 °C

System components

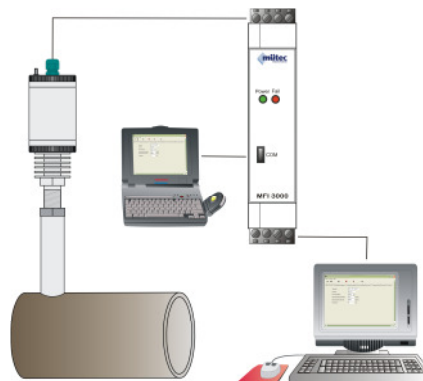


A complete measuring system **MF3000** contains the **sensor**, a **cable**, a DIN-rail **transmitter** and the software **MF-SMART**


Transmitter



Communication Unit (Optional)

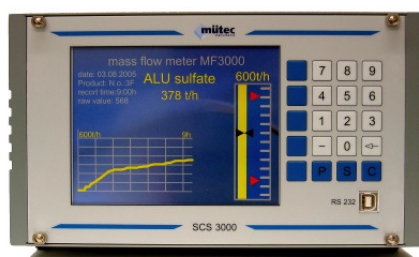

Sensor

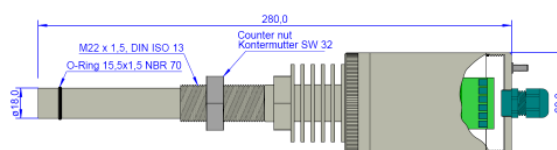

Mütec Instruments GmbH

Bei den Kämpfen 26
D-21220 Seevetal-Ramelsloh

Tel. 04185/8083-0
Fax 04185/8083-80

Mail: muetec@muetec.de
Web: www.muetec.de