

Data Sheet

Pressure transmitter Type **DST P140**

For industry applications



The Danfoss Sensor Technology (DST) P140 is designed for use in industrial applications like Booster Pumps and Air Compressors.

Drawn from over 30 years of experience with MEMS technology, the DST P140 offers outstanding performance in a compact and durable stainless-steel package.

Running a powerful ARM-based microcontroller, the DST P140 offers diagnostic features and performance features at a competitive level.

Features

- Hermetically sealed media interface (all stainless steel, fully welded)
- Compact and cost effective design for OEM applications
- Superior shock and vibration resistance
- High overload and burst pressure
- Robust electronics platform for harsh electrical environments

Product specification

Technical data

Table 1: Performance

Accuracy @ 20 °C	≤ ±0.5% FS
Total error band	0 - 100 °C: 2% -40 - 0 °C: 3%
Response time	< 2 ms
Overload pressure	4 × FS
Burst pressure	5 × FS
Durability, P: 10-90% FS	>10 mil. cycles

Table 2: Electrical specifications

Nom. output signal (short-circuit protected)	4 – 20 mA
Supply voltage [UB], polarity protected	8 - 28 V
Supply voltage dependency	≤ ±0.1% FS/10 V
Load [RL] (load connected to 0 V)	RL ≤ (UB-8V)/0.022 A

Table 3: Environmental conditions

Media temperature range	-40 to 100 °C		
Ambient temperature range	-40 – 85 °C		
Storage temperature range	-50 – 150 °C		
EMC - Emission	EN 61000-6-3		
EMC Immunity up to 6 GHz	EN 61000-6-2		
Insulation resistance	> 100 MΩ at 500 V		
Vibration resistance	Random	10 grms, 5 Hz - 2 kHz	IEC 60068-2-64
Shock resistance	Shock	500 g / 1 ms	IEC 60068 - 2 - 27
Enclosure with mating connector			IP67


Table 4: Mechanical characteristics

Wetted parts	AISI 304L
	AISI 316L
Electrical connections	see Electrical connections section
Weight (depending on pressure connection and electrical connection)	< 100 g

Output and diagnostics

4 - 20 mA example

Figure 1: Output and Diagnostics

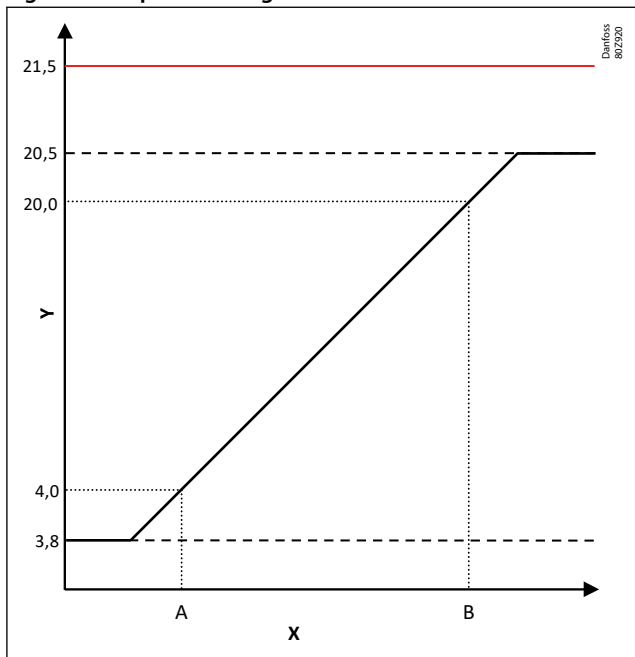

X	Application pressure
Y	Output signal [mA]
A	Zero
B	Full scale
— (red)	Fault detection signal
- - - - (dashed)	Output clamping
— (solid)	Pressure transfer function

Output clamping levels

- Limit the output signal if the pressure rises above or falls below the normal range

Fault detection signal level

- Placed above the pressure output range. Output at this level signals a sensor fault

Contact Danfoss for detailed information and requirements.

Dimensions / Combinations

Table 5: Dimensions

M12x1.0	Metri-Pack 150.2 (Round)
<p>45,45</p> <p>31,46</p> <p>G1/4</p> <p>G 1/4 - ISO 1179-2</p>	<p>59,1</p> <p>44,11</p> <p>1/4-18NPT</p> <p>1/4-18NPT</p>

Table 6: Dimensions

Metri-Pack 150.2 (Round)	M12
<p>58,1</p> <p>44,1</p> <p>G1/4</p> <p>G 1/4 - ISO 1179-2</p>	<p>46,45</p> <p>31,45</p> <p>R 1/4</p> <p>R 1/4 - ISO 7-1</p>

Electrical connections

Table 7: Electrical connection specifications

	M12x1.0	Metri-Pack 150.2 (Round)
HEX 27	<p>1</p> <p>2</p> <p>3</p> <p>Ø29.5</p> <p>No pin in position 4.</p>	<p>Pin C</p> <p>Pin B</p> <p>Pin A</p> <p>Ø29.5</p>
Pin-plating	Gold (Au)	Tin (Sn)
Pin configuration	Pin 1: +Supply Pin 2: not connected Pin 3: -Supply	Pin A: -Supply Pin B: +Supply Pin C: not connected

Ordering

Table 8: Ordering type

Type	Pressure reference	Pressure ranges	Electrical connection	Output signal	Pressure connection	Standard	Code no. ⁽¹⁾
DST P140	Gauge	0 - 4 bar	M12x1.0	4 - 20 mA	G ¼A	ISO 1179-2	075G4034
		0 - 6 bar					075G4035
		0 - 10 bar					075G4027
		0 - 16 bar					075G4029
		0 - 25 bar					075G4031
		0 - 40 bar					075G4033
		0 - 4 bar	Metri-Pack 150 (Round)		G ¼A	ISO 1179-2	075G4064
		0 - 6 bar					075G4052
		0 - 10 bar					075G4053
		0 - 16 bar					075G4054
		0 - 25 bar					075G4055
		0 - 40 bar					075G4056
		0 - 100 psi	Metri-Pack 150 (Round)		¼-18NPT 8 mm Ø	ANSI/ASME B1.20.1	075G4026
		0 - 150 psi					075G4028
		0 - 200 psi					075G4030
		0 - 300 psi					075G4032
		0 - 4 bar	M12x1.0		R ¼	None	075G4073
		0 - 6 bar					075G4074
		0 - 10 bar					075G4059
		0 - 16 bar					075G4060
0 - 25 bar	075G4061						
0 - 40 bar	075G4075						

⁽¹⁾ Are delivered in I-pack of 60 pcs., and must therefore be ordered in multiplum of 60 pcs.

Accessories

Table 9: Cable accessories

Type	I-Pack Code no.	Qty/Box	Description
Cable with Metri-Pack 150 (Round) mating connector	060G8085	60 pcs	0.8 m with outer sheath
Cable with Metri-Pack 150 (Round) mating connector	060G8086	60 pcs	1.3 m with outer sheath
Cable with Metri-Pack 150 (Round) mating connector	060G8193	100 pcs	1.7 m with outer sheath
Cable with Metri-Pack 150 (Round) mating connector	064G0910 ⁽¹⁾	14 pcs	10 m with outer sheath
Cable with Metri-Pack 150 (Round) mating connector	060G8195	100 pcs	1 m without outer sheath
Cable with Metri-Pack 150 (Round) mating connector	060G8196	100 pcs	2.5 m without outer sheath
Cable with M12 mating connector	060G8198	60 pcs	2m shielded
M12 to PG9 angle adaptor	060G8227	60 pcs	-
M12 to PG9 straight adaptor	060G8228	60 pcs	-

⁽¹⁾ Multi Pack code number is 064G0950

For more options and info, please go to <https://store.danfoss.com>

Certificates, declarations, and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may change over time. You can check the most current status at danfoss.com or contact your local Danfoss representative if you have any questions.

Table 10: Certificates and declarations

File name	Document type	Document topic	Approval authority
060R3142.06	Manufacturers Declaration	PED	Danfoss
E494625	Electrical - Safety Certificate	-	UL
E510763	Electrical - Safety Certificate	-	UL

Conformity

- CE marked
- RoHS compliant
- EAC declaration
- UL (file no: E494625)
- NSF and WRAS listed for ¼-18NPT and R1/4 versions

Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at store.danfoss.com.

Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at www.danfoss.com/en/service-and-support/documentation.

Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at www.danfoss.com/en/service-and-support/learning.

Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: www.danfoss.com/en/choose-region.

Spare Parts



Get access to the Danfoss spare parts and service kit catalog right from your smartphone. The app contains a wide range of components for air conditioning and refrigeration applications, such as valves, strainers, pressure switches, and sensors.

Download the Spare Parts app for free at www.danfoss.com/en/service-and-support/downloads.

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.