



Description & Features:

- Designs for Pt100
- Output signal 4~20mA two wires
- Configurable measuring ranges
- Large ambient temperature range
- Compact and inexpensive

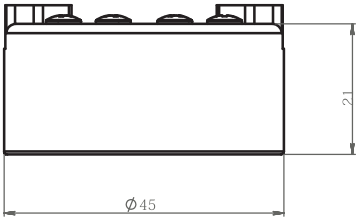

Dimensions (mm)



Specifications	
Input	1 x Pt100 (2- or 3-wire)
Measuring range	-200°C ~ +600 °C
Supply voltage	12-30VDC , 24VDC
Output signal	4-20mA , 2-wire
Accuracy	0.5%F.S , 0.2%F.S
Reaction time	1ms , 10-90%F.S
Stability	0.1%F.S/ 12 months
Temperture drift	0.03%F.S/10 °C
Output distance	1000 meters
Load resistance	Less than 800Ω

Permissible temperature	
Environment temperature	-20-80°C
Storage temperature	-40-125°C

Material	
Case	PVC
Electrical connection	6 soldered jumpers , silver-plated brass
Mounting thread	2*M4 screw , with damping spring

Mechanical stability	
Anti-vibration	20g , 20-5000Hz
Anti-shock	100g , 11ms

Electrical protection	
Insulation resistance	500V/100MΩ
Electrical protection	short-circuit protection, polarity protection

Calibration	
Calibration at factory	setting according to the requirements
Adjustment range span	approx. +-5%

Electromagnetic compatibility	
EMC	EN61326

Goods info	
Weight	50g
Packages	Carton

Measuring range				
0-100°C	0-150°C	0-200°C	0-250°C	0-300°C
0-400°C	0-500°C	0-600°C	-50-50°C	-50-100°C
-50-150°C	-100-0°C	-100-50°C	-100-100°C	
Customer				